BANGCHAK SUPER HDX

Lubricant for Diesel Vehicles





BANGCHAK SUPER HDX is a single-grade lubricating oil formulated from high quality base oil and additives. It is formulated to exceed API CC/SD.

The benefits of BANGCHAK SUPER HDX include the following properties :

- Increased detergency to keep engine cleaner
- Provided protection from high temperature deposits
- Provided protection from bearing corrosion
- Effective control of ring, piston and cylinder wear

MEET REQUIRMENT

o API CC/SD


APPLICATION

BANGCHAK SUPER HDX is suitable for light pickup, agricultural equipment, water pump, household generator and 4-stroke motorcycles.

TYPICAL INSPECTION

PROPERTIES	METHOD	BANGCHAK SUPER HDX SAE 40
Appearance	Visual	Bright & Clear
Color	ASTM D1500	Report
Density @ 15 °C, g/cm3	ASTM D1298	Report
Flash Point (COC), °C	ASTM D92	230 Min
Foam Test (Seq II), mL/mL	ASTM D892	50/0 Max
Pour Point, °C	ASTM D97	-6 Max
Kinematic Viscosity@ 100 °C, cSt.	ASTM D445	14.5-15.5
Viscosity Index	ASTM D2270	95 Min
TBN, mg KOH/g	ASTM D2896	3.5 Min

Packaging : 1 Litre, 5 Litres, 18 Litres, 200 Litres

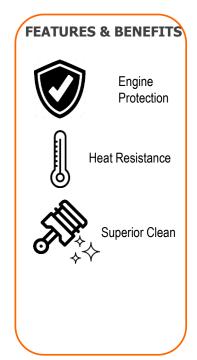

Additional Information Available at www.bangchaklubricants.com

SD-PD-02/1-32 REV. NO.: 08 , DATE: 01/01/2023