


# BANGCHAK CHASSIS 2

Adhesive Water Resistant Grease

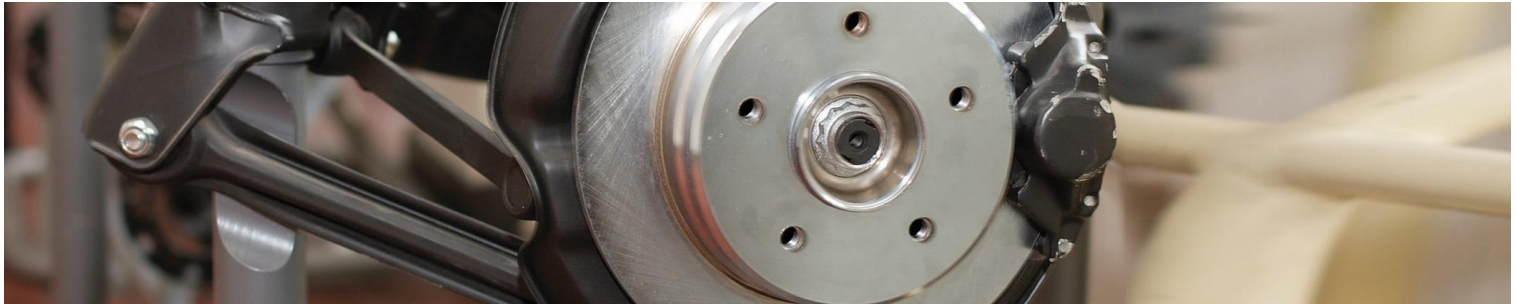


**BANGCHAK CHASSIS 2** is an outstanding, calcium-soap grease having properties of excellent water-resistance, mild temperature resistance and tenacious fibers. It is designed for lubrication of vehicle chassis, including those subjected to severe vibration, shocks and stresses in general.

- o Stable form with water and moisture resistant
- o Tackifier added for surface stickiness benefit
- o Superior lubricating performance
- o Medium pressure and temperature durability

## APPLICATION

BANGCHAK CHASSIS 2 is recommended for lubricating of vehicle chassis such as ball joints, control arms, king pins and other chassis point. For the lubrication of the ball and industrial roller bearings in any equipment, the maximum temperature should not over 80 °C.

## FEATURE & BENEFITS



Excellent Lubrication

## TYPICAL INSPECTION

PROPERTIES	METHOD	CHASSIS 2
NLGI NUMBER		2
THICKENER		Calcium
BASE OIL VISCOSITY @ 100 °C , cSt	ASTM D445	15-25
DROPPING POINT, °C	ASTM D2265	90 Min
PENETRATION,WORKED @ 25°C	ASTM D217	265-295

Packaging : 15 kilograms , 180 kilograms